


TECHNICAL BULLETIN

Part Number	KCS10U
Description	10 pairs disconnection universal termination
Internal Ref	N/A

REVISION HISTORY

Revision #	Description	Date	Author
0	First release	16-04-2007	RN

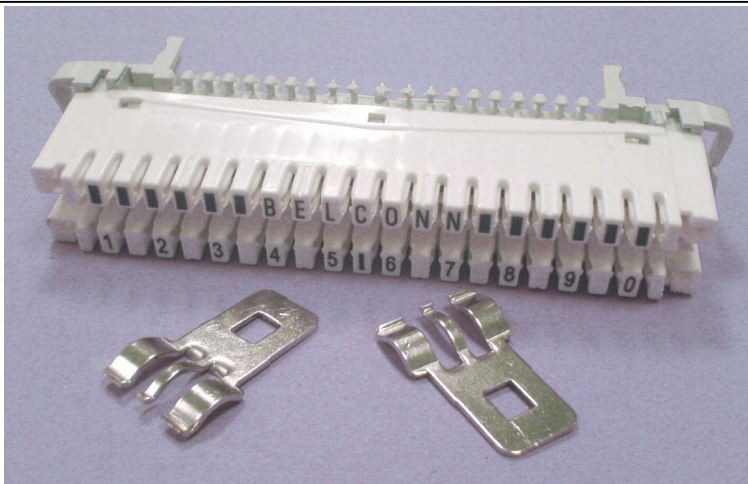

DESCRIPTION

- 10 pair disconnection module
- 45° angled IDC terminations, silver plated
- Wire gauge 0.4 to 0.9 mm
- Can mount on standard teeth frames or on vertical rods.
- Integrated earthing
- Available with numbering 1 to 0 (standard) or 0 to 9 (p/n KCS10S0-9)
- Wire range of accessories available

Detailed Description	10 pair disconnection termination, universal mount
Compatible with	Belconn's KCS, SDS, SDCK, SDC, IDF, IDB
Applicable standards	None specific
Installation	On back mount frames ("teeth style") or vertical parallel rods
Packing	Box of 10 unit
Accessories supplied	Fixing clips
Material	Housing: grey/ivory polycarbonate Contacts: phosphor bronze, silver plated > 1 µm Clips: phosphor bronze, tin/nickel plated
Contact resistance	≤ 1mΩ
Insulation resistance	≥20 GΩ @ 500 Vdc
Dielectric strength	≥ 2000 Vrms @ 50 Hz, 1 minute
Wire Gauge	0.4-0.9 mm solid copper, max outside diameter 2.1 mm